




Charging Circuit

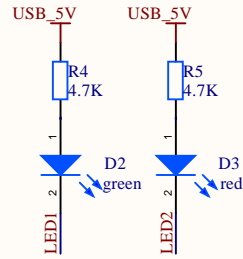


Charging Indicator

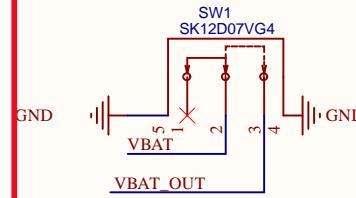


Mains Switch

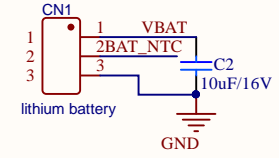

Lithium Battery Interface

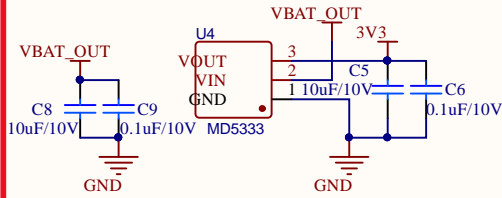


LDO Voltage Regulator

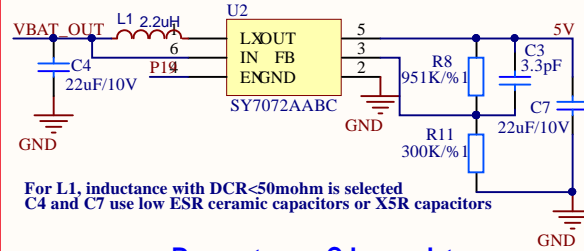


For L1, inductance with DCR<50mohm is selected
C4 and C7 use low ESR ceramic capacitors or X5R capacitors


Booster Circuit

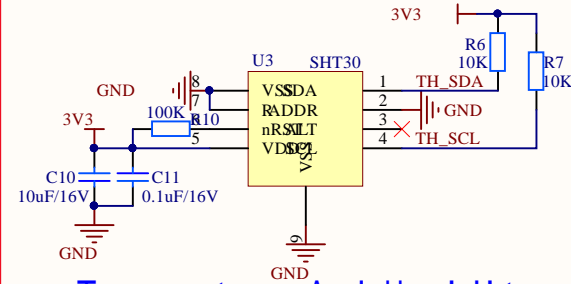


Temperature And Humidity

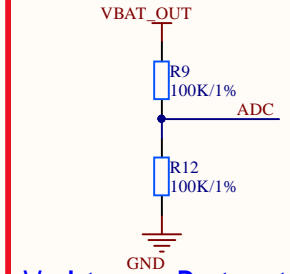


Voltage Detection

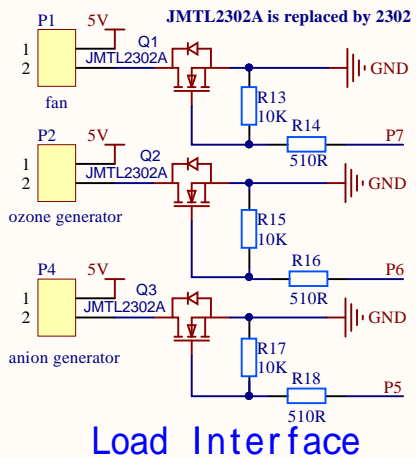


Load Interface



Indicator Port
Key And Reset Key Interface

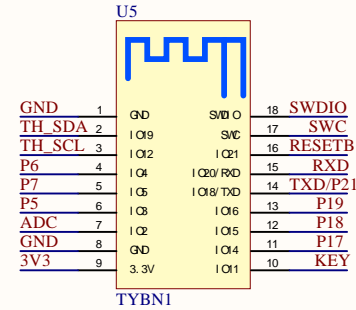

Bluetooth Module

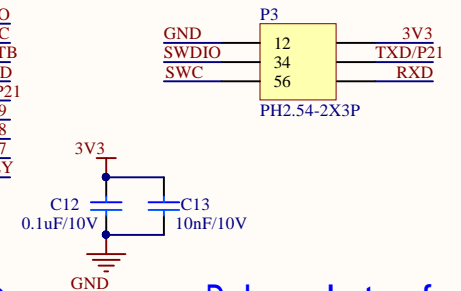

Debug Interface

Title		
Size	Number	Revision
A4		
Date:	2021/10/14	Sheet of
File:	F:\工作资料\智能除味器主控板-奥	DocNo: